


Dosing is based on pool size with no probes to clean or calibrate for simple management and reliability.

- ✓ Integrates with the NKD-R and NKD-C Freshwater Systems
- ✓ Plug and play
- ✓ Adjustable running and priming timers
- ✓ High quality peristaltic pump motor
- ✓ Superior chemical resistance

- ✓ Probe Free doses acid based on size of the swimming pool
- ✓ PVC rollers ensuring low wear and tear
- ✓ Quality squeeze tube Tygon® MF Norprene®
- ✓ IP34 Rated
- ✓ 12 months warranty

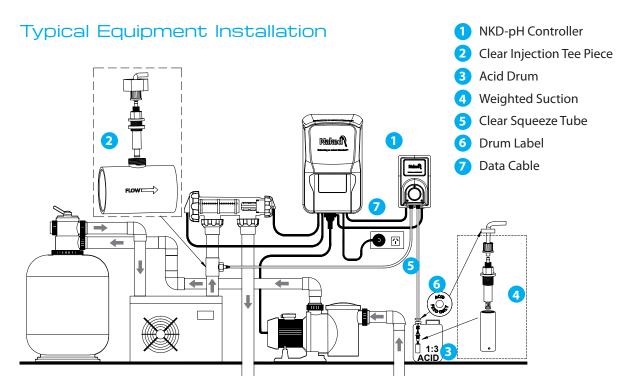

| Specifications | |
|--------------------------------------|------------------------------------|
| Volts Input (Vac) | 220-245 |
| Amps Input - Max. (Aac) | 1.00 |
| Total Power Consumption (W) | 13W Motor - 20W Total |
| Frequency (Hz) | 50 |
| pH Controller Dimensions (mm) | 135W x 225H x 123D |
| Output Controlled by Sanitiser (LPH) | 0-1.0 |
| Rated Pressure (kPa) | 350 |
| Squeeze Tube | Tygon® Norprene® (Commercial spec) |
| Motor Speed (RPM) | 10 |
| Non-Return Injector Valve | PVC with viton sleeve |
| Tubing | 4m x 4mm PVC |
| Roller Block | Heavy-duty PVC |
| Power Cord | Approved piggy-back type |
| Water Connection | 40/50mm |
| Water Flow Rate (L/min) | 80-650 |
| IP Rating | 34 |
| Net Weight (kg) | 2.5 |
| | |



